

INSTALLATION OF HEPVO WITH WASHING MACHINE OR DISH WASHER

When installing a W/M or D/W care should be taken to observe the manufacturers instructions with regard to the height of the discharge hose and incorporation of an air break or vent to atmosphere

Waste water from W/M or D/W


See manufacturers guidelines for this height

Air gap between upstand tubing and discharge hose to provide an air break

12" min.

1 1/2" HepvO

1 1/2" dia min.

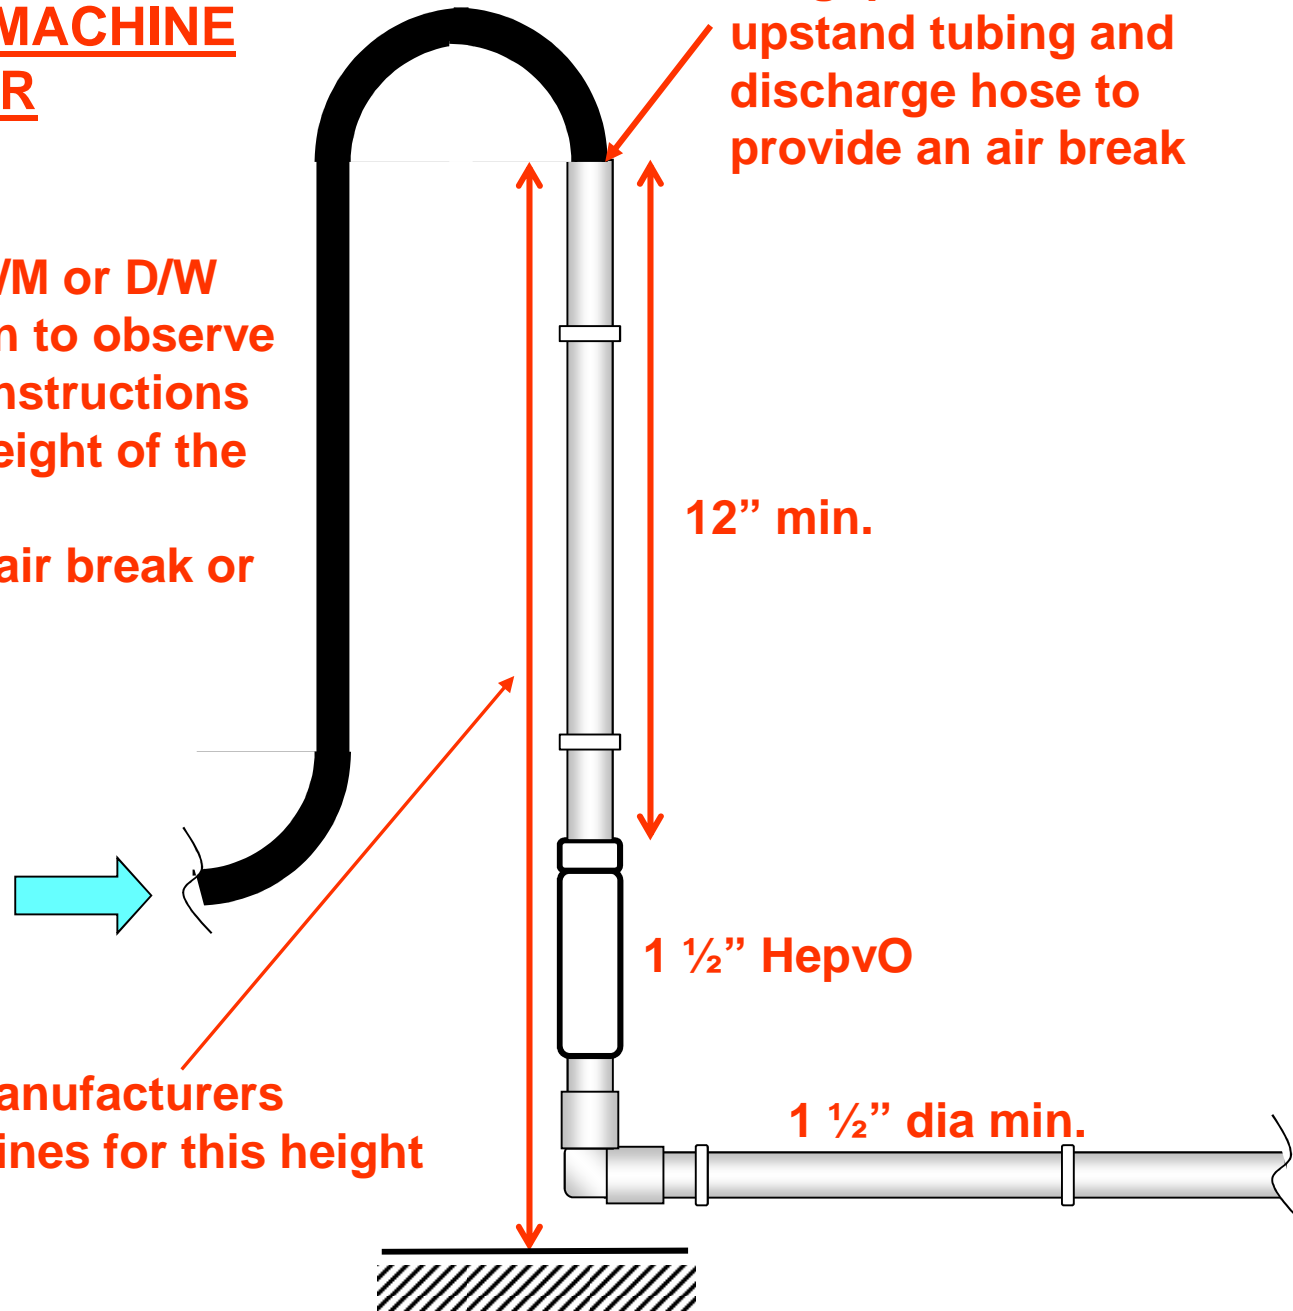

INSTALLATION OF WASHING MACHINE OR DISH WASHER TO HEPVO - BELOW SINK

